


# 25-114 M1

VARIABLE SPEED "MAXI-LATHE VF"



**MAXI-LATHE VF**

**New!**

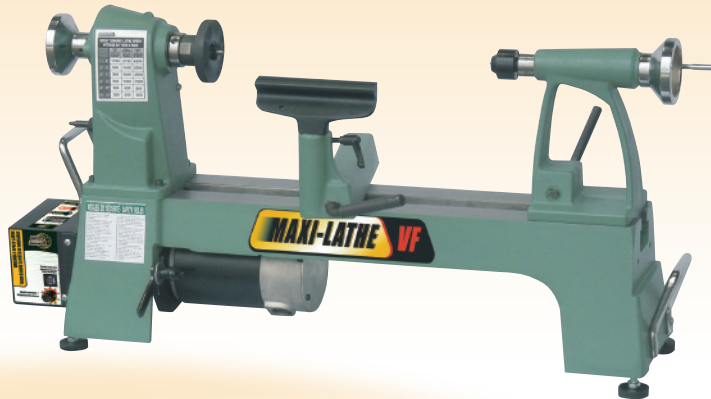

Forward or reverse spindle rotation selector switch for precision workpiece sanding and polishing.

Quick lock control levers easily position tool-rest.

Stable cast-iron frame, head and tailstock to reduce chatter and vibration for smoother turning.

Maximum distance of 17" between centers.

Maximum distance of 40" between centers with optional bed extension (Item #25-116).

Quick release lever for quick belt positioning changes.

3 variable speed ranges; 250-800, 550-1700 & 1200-3600 RPM.

Features positive indexing in 15° increments - total 24 indexing positions.

Heavy-duty 1" diameter tool rest post.

## FORWARD / REVERSE SPINDLE ROTATION

*Optional*



4" - 4 JAW SCROLL CHUCK 1" - 8

ITEM # 25-105

*Optional*



STAND

ITEM # 25-195

*Optional*



23" BED EXTENSION FOR 40" BETWEEN CENTERS

ITEM # 25-116

SPINDLE SPEED	250 - 3600 RPM
SWING OVER BED	14" (356 mm)
SWING OVER TOOL REST	10 3/4" (273 mm)
DISTANCE BETWEEN CENTERS	17" (432 mm)
SPINDLE THREAD	1" - 8 TPI
TAILSTOCK THROUGH HOLE	3/8" (10 mm)
MORSE TAPER	MT#2 (HEADSTOCK & TAILSTOCK)
SELF EJECTING TRAVEL	2" (51 mm)
TOOL REST	6" (152 mm)
FACE PLATE	3" (76 mm)
INDEXING POSITIONS	24 X 15°
MOTOR	3/4 HP, 110 V, 5 A, 1950 RPM
WEIGHT	93 LBS (42.5 kg)